



CHAD-O-CHEF

Lifestyle products



SIZZLER HYBRID ATTACHMENT INSTALLATION & OPERATING INSTRUCTIONS

**Please read these instructions carefully before installation
- use and retain them for future reference**



SHB410

General Instructions and Safety notes

DO NOT begin assembly of your Sizzler Hybrid Braai, until you have read and understand the Assembly and Safety Instructions fully.

***The Sizzler Hybrid Braai may not be used in conjunction with our Hob-Grill Gas Braai.**

Refer to the **Sizzler Instruction Manual** for assembly, maintenance and further operating instructions of your Sizzler Gas Braai.

- **Remove ALL protective PVC film covering the unit before use** and only AFTER assembly is complete. As you could scratch the surfaces during the assembly process.
- The Sizzler Gas Braai associated with the Sizzler Hybrid Braai requires an operating pressure of 2,8 kPa at the appliance.
- A suitable LPG regulator that complies with the requirements of SANS 1237 must be installed with the Sizzler Gas Braai associated with this product.

Warning: If you own a Chad-O-Chef Sizzler Hybrid:

A qualified gas installer must install a shut off valve into the Gas line that is easy to locate and approximately 1 to 2 metres before the inlet elbow of the Sizzler Gas Braai.

Only clean the unit with hot soapy water and never with any abrasive materials.


Caustic Oven cleaners can fatigue stainless steel with rust.

Ventilation requirements:

This appliance is designed to function with the ventilation holes designed into the front and back of the Sizzler Gas Braai associated with this unit. Take care to ensure all ventilation holes are not obstructed during use.

***Do not fully cover the cooking area with a solid plate whilst braai is on, this will result in component failure.
(This unit is not an oven)***

1. Dimensioned View (assembled)

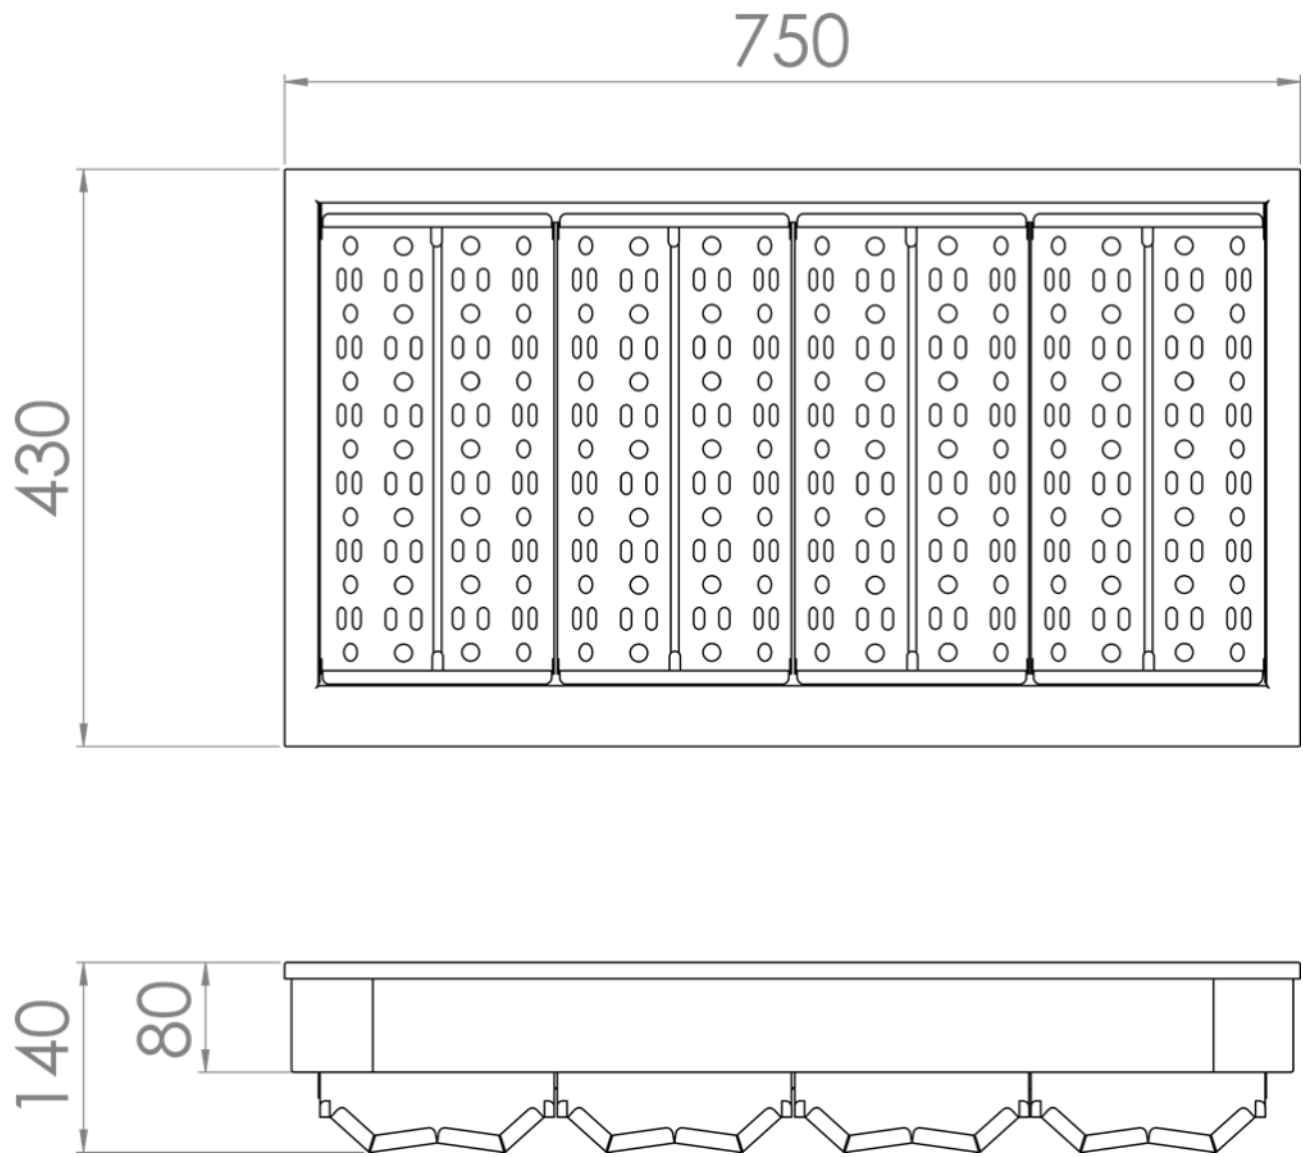

2. Igniting and Turning off the Sizzler Hybrid Gas Braai

WARNING: If at anytime during the igniting process, or during use, you smell gas, immediately turn off the gas supply to the appliance at both the Burner Control Knobs and the shut off valve on the Gas Bottle.

If you suspect that there is a gas leak, DO NOT use the appliance until it has been checked and/or serviced by a qualified gas service technician

1. Open all gas shut-off valves, supplying your Sizzler Hybrid braai.
2. Remove Top-Grids and insert Charcoal and/or Wood (Ø80mm logs Maximum)
3. Push and turn far LH control knob counter-clockwise to "ON" position
4. Push Ignitor button, to ignite Burner 1.
5. If not alight after 4/5 strikes, turn gas off and wait for 30sec.
6. Turn on knobs 2, 3/4/5/6 on High in sequence.
7. After use, turn off all control knobs and valve on gas bottle, including shut-off

It may be necessary to push the ignitor button several times especially after changing a cylinder.


Should your braai not light after repeated attempts, have the unit examined by a qualified gas technician.





Turning off the Sizzler Gas Braai

To turn off the appliance, turn all the Control knobs in a clockwise direction to the OFF position. Then close the master shut-off at the gas bottle. This will shut off all gas supply to the appliance.

3. Exploded View

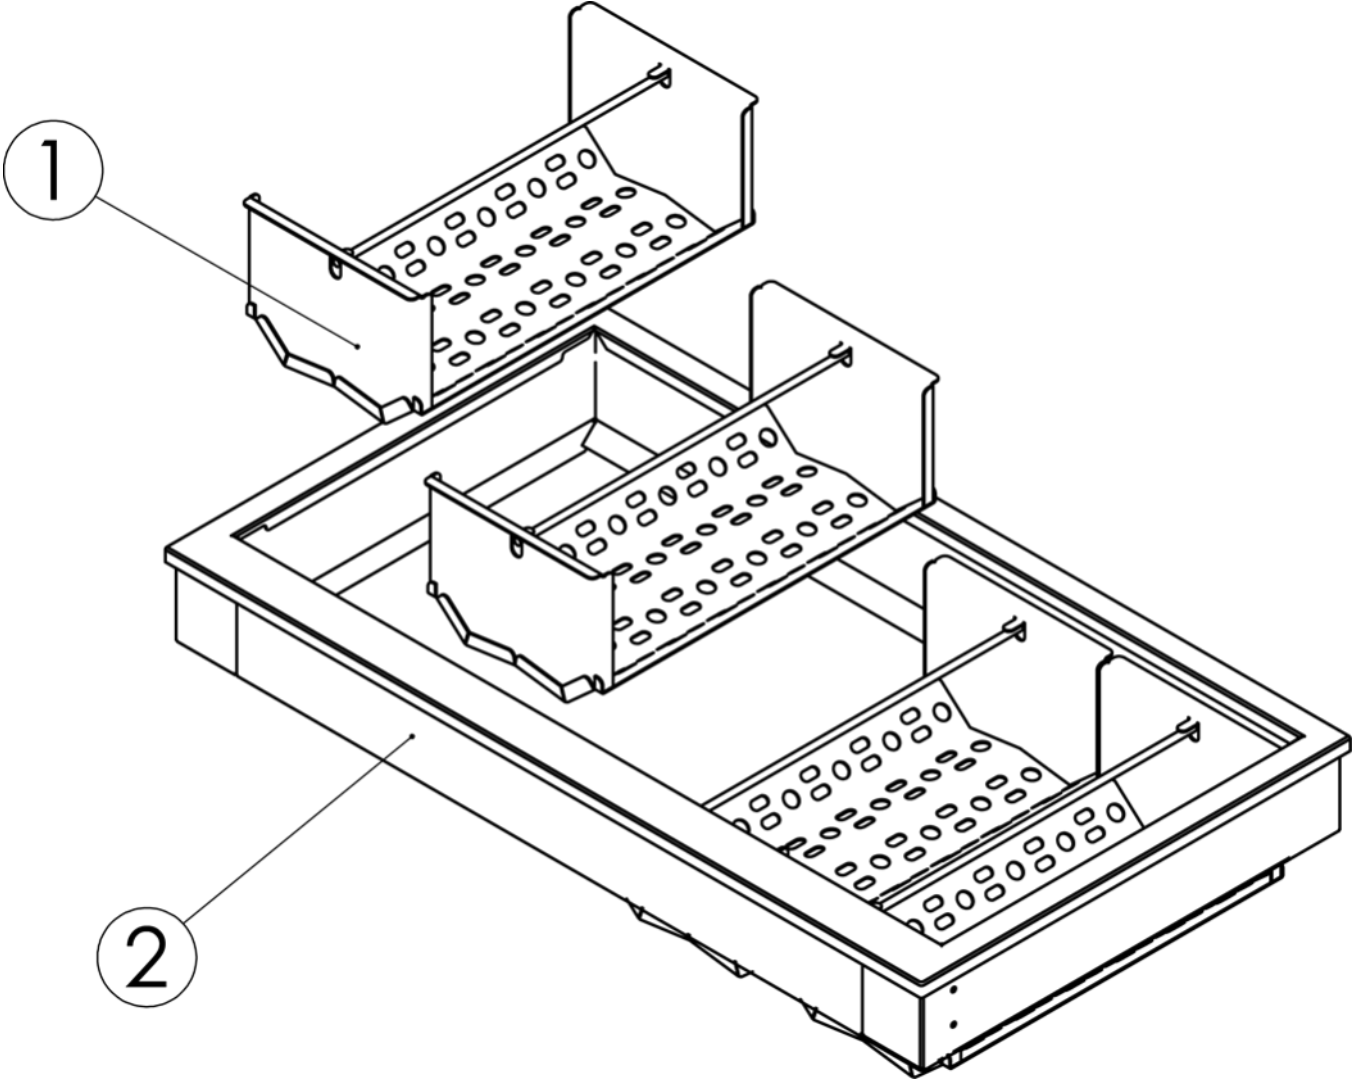


4. Total Parts List


1		Sizzler Hybrid Body	x1
2		Ember Basket	x4

5. Assembly Instructions


Remove 4 Top Grids, Rock and 4 Bottom Grids from Sizzler Gas Braai and drop Sizzler Hybrid Body into place.

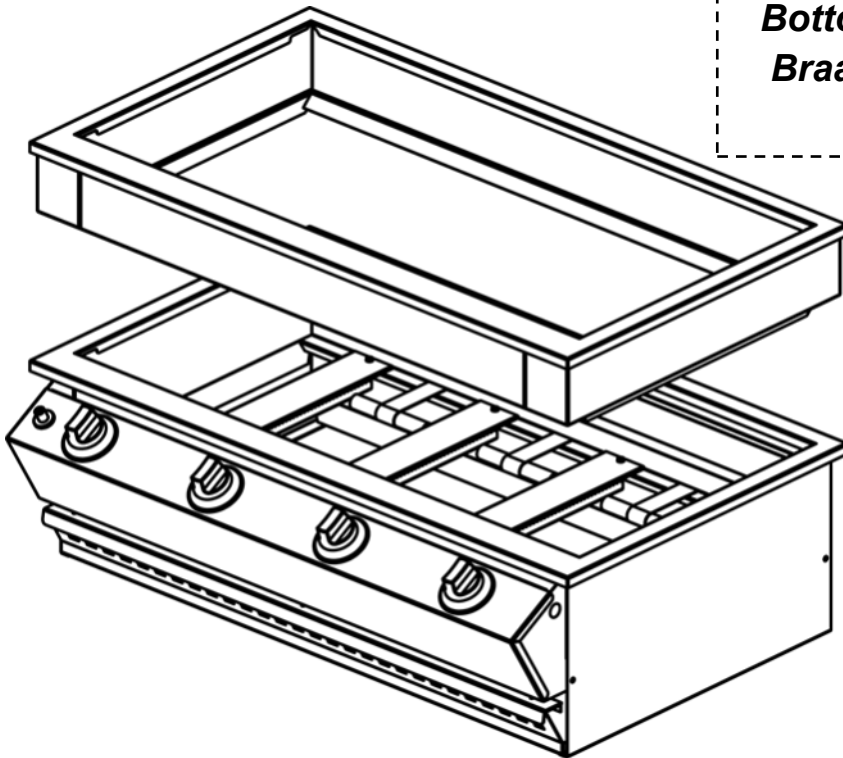

Drop all 4 Ember Baskets into Sizzler Hybrid Braai.

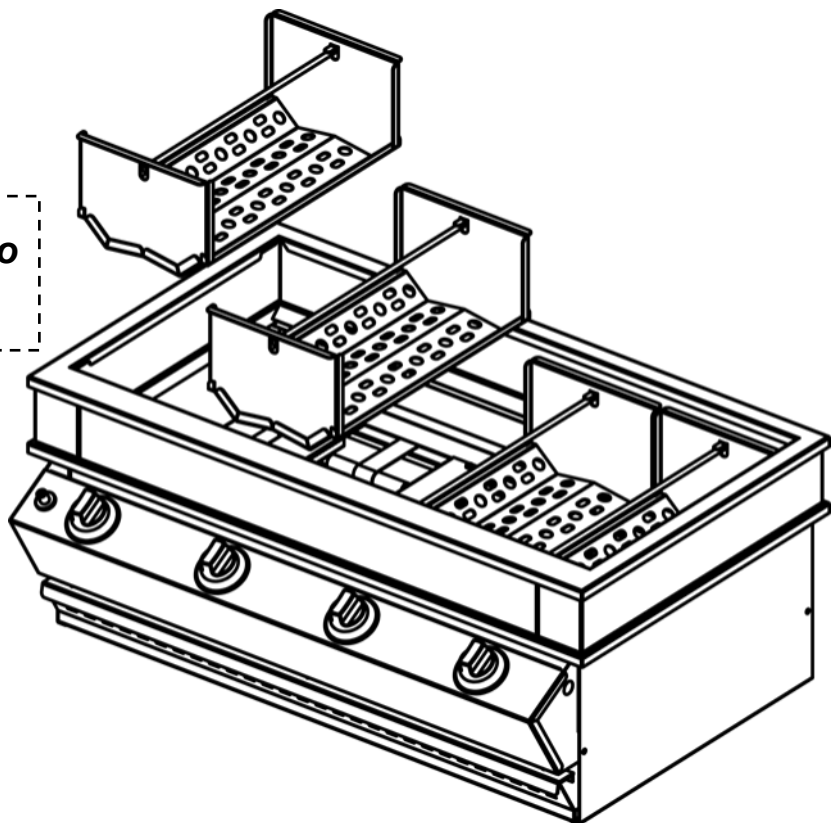

***Drop 4 Top Grids into Sizzler
Hybrid Braai.***

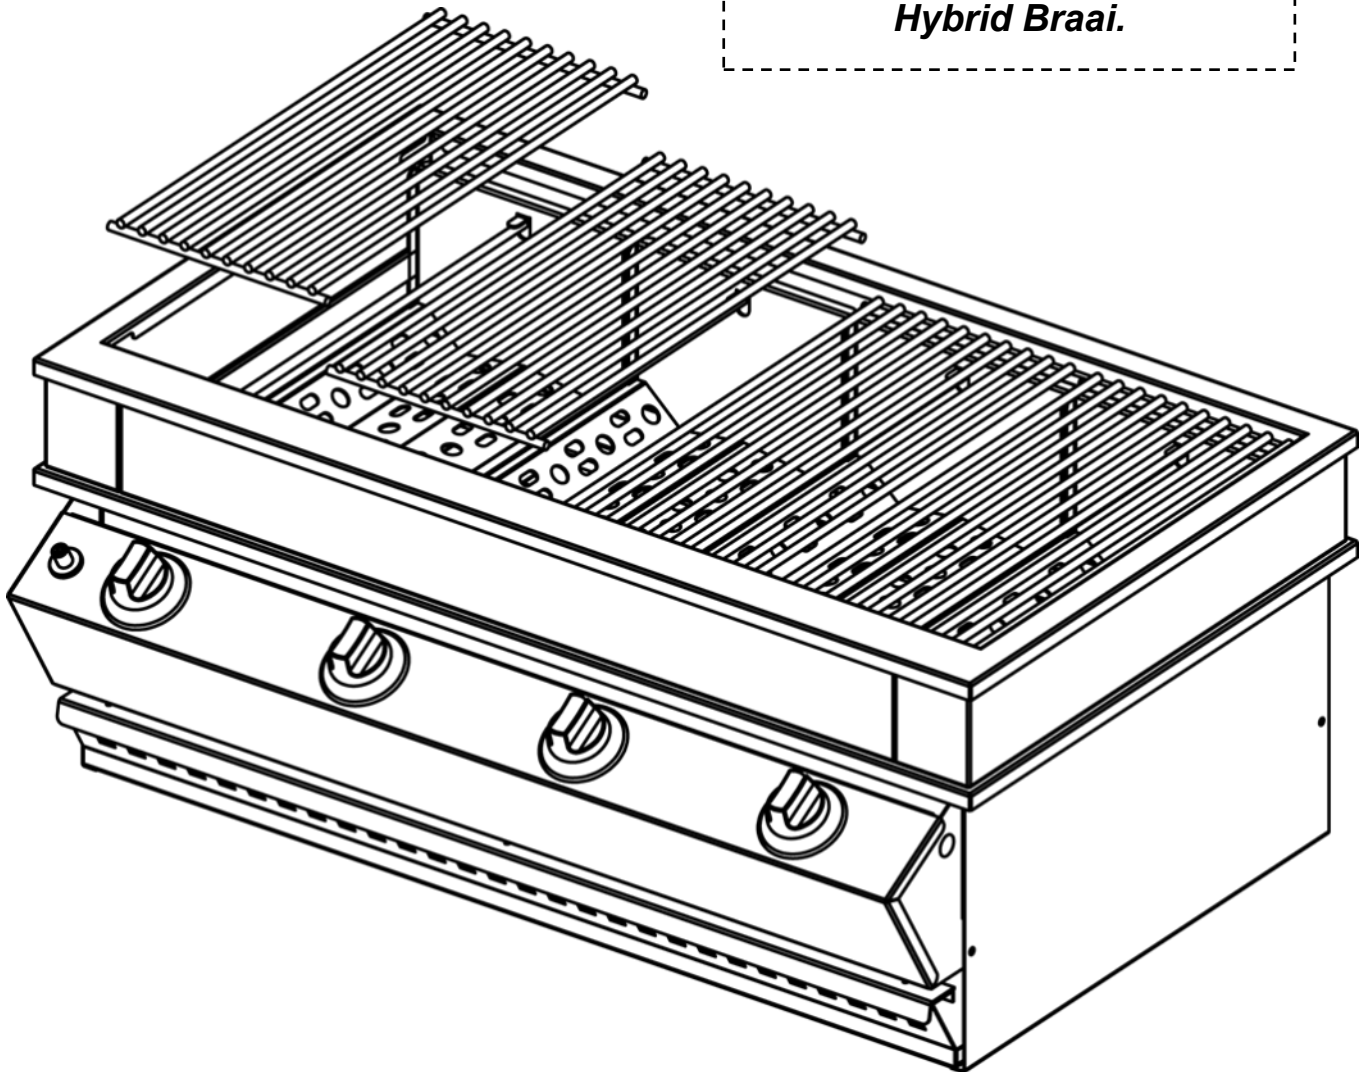

Manufactured By:
Chad-o Engineering
PO Box 986 Honeydew 2040
Tel: (011) 668 1910
Email: Sales@chad-o-chef.co.za
www.chad-o-chef.co.za



CHAD-O-CHEF
Lifestyle products



Guarantee Claim Form

Chad-O-Engineering(Pty)LTD
Reg. No: 2002/023412/07
Vat Reg No: 4690123031

Tel: +27 11 668 1910 | Fax: 086 612 5431
email: sales@chad-o-chef.co.za
www.chad-o-chef.co.za

PO Box 986
Honeydew,
2040 South Africa
229 Short Road, Muldersdrift 1747

The Guarantee given by Chad-O-Engineering (Pty) Ltd covers the working components, on all Chad-O-Chef Gas Grills for the period of 3 Years, for manufacturing defects caused in the manufacturing process. This does not cover component malfunction if the product is not installed by a registered Gas Installer.

Chad-O-Engineering (Pty) Ltd will not be held responsible in the event of rust or fatigue of components due to incorrect cleaning of the product.

Product Name: _____

Invoice No: _____

Serial No: _____

Describe the fault:

Contact Details:

Please attach a copy of the Gas Installation certificate and
email to: services@chad-o-chef.co.za